



BOLTING

Controlled Bolting Equipment & Services

HYDRAULICS

HEXPRO SERIES LOW PROFILE WRENCHES

HEXPRO™ Series Low Profile Wrenches are essential tools for limited clearance applications. The versatile HEXPRO™ Series supports an extensive range of interchangeable hexagon ratchet links that deliver a torque range of 170 ft-lbs. to 30,500 ft-lbs.






BOLTING

Controlled Bolting Equipment & Services

SPECIFICATIONS

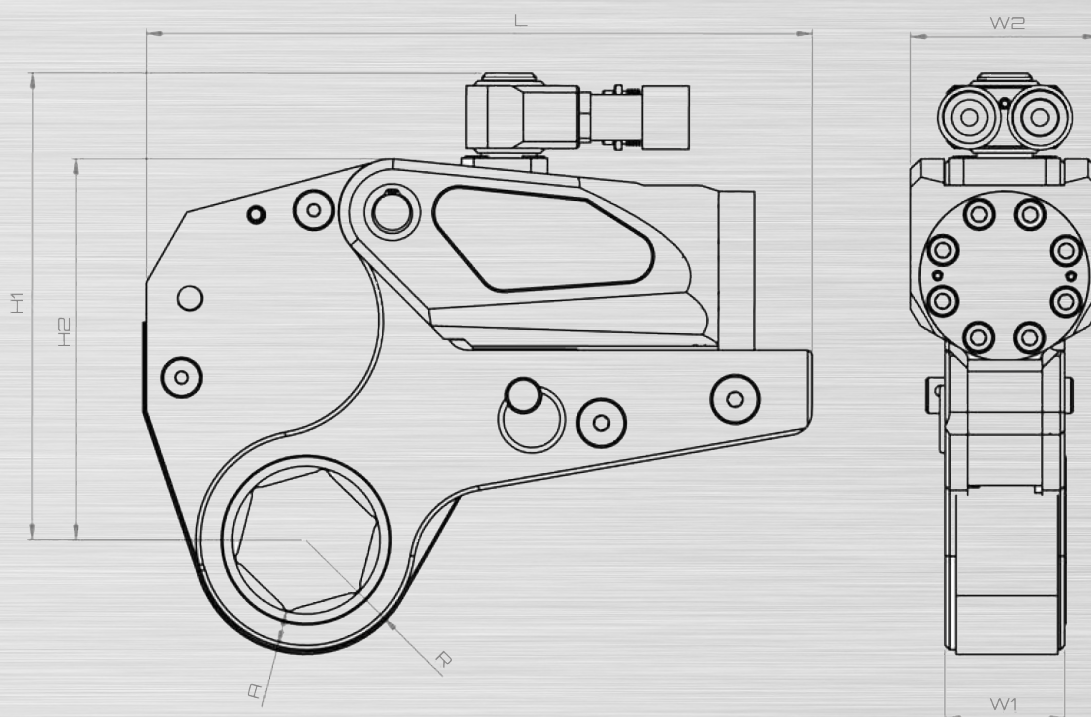

TorsionX **HEXPRO**

Model	2HP		4HP		8HP		14HP		30HP	
Torque (Ft-lbs)	162 - 1,714		439 - 4,500		762 - 8,100		1,245 - 13,443		2,846 - 28,861	
Torque (Nm)	220 - 2324		595 - 6,101		11,033 - 10,982		1,689 - 18,229		3,858 - 39,130	
Hex Size (Imperial)	3/4" - 2.3/8"		1.5/16" - 3.1/8"		1.1/2" - 3.15/16"		2" - 4.5/8"		3.1/8" - 6.7/8"	
Hex Size (Metric)	19mm - 60mm		36mm - 80mm		41mm - 100mm		50mm - 100mm		80mm - 175	
Power Head	3 lbs	1.36 kg	5 lbs	2.27 kg	8 lbs	3.63kg	13 lbs	5.90 kg	27 lbs	12.27 kg
Ratchet Link	4 lbs	1.81 kg	9lbs	4.09 kg	16 lbs	7.27 kg	26 lbs	11.82 kg	70 lbs	31.82 kg
L	7.32"	185.9mm	9.72"	246.9mm	11.87"	301.5mm	14.24"	361.7mm	17.05"	433.1mm
H1	5.26"	133.6mm	7.85"	199.4mm	8.43"	214.1mm	9.41"	239.0mm	12.40"	315.0mm
H2	4.12"	104.7mm	5.71"	145.0mm	6.95"	176.5mm	8.00"	203.2mm	11.22"	285.0mm
W1	1.25"	31.8mm	1.65"	41.9mm	2.08"	52.8mm	2.52"	64.0mm	3.35"	85.1mm
W2	2.00"	50.8mm	2.60"	66.0mm	3.27"	83.1mm	3.88"	98.6mm	5.16"	131.1mm
A	.390"	9.9mm	.580"	14.7mm	.650"	16.5mm	.740"	18.8mm	1.010"	25.7mm
R	1.054" - 1.766"	26.8mm - 44.9mm	1.397" - 2.393"	35.5mm - 60.8mm	1.882" - 2.944"	46.3mm - 74.8mm	2.34" - 3.416"	59.4mm - 86.8mm	3.037" - 4.559"	77.1mm - 115.8mm